




TECHNICGUM
POLYMERES

Chemin de Casteau 56
7063 Neufvilles - Belgium
www.tgipoly.com
T : +32 65 73 10 93
F : +32 65 73 10 94

Drum Coating **CeraGum**

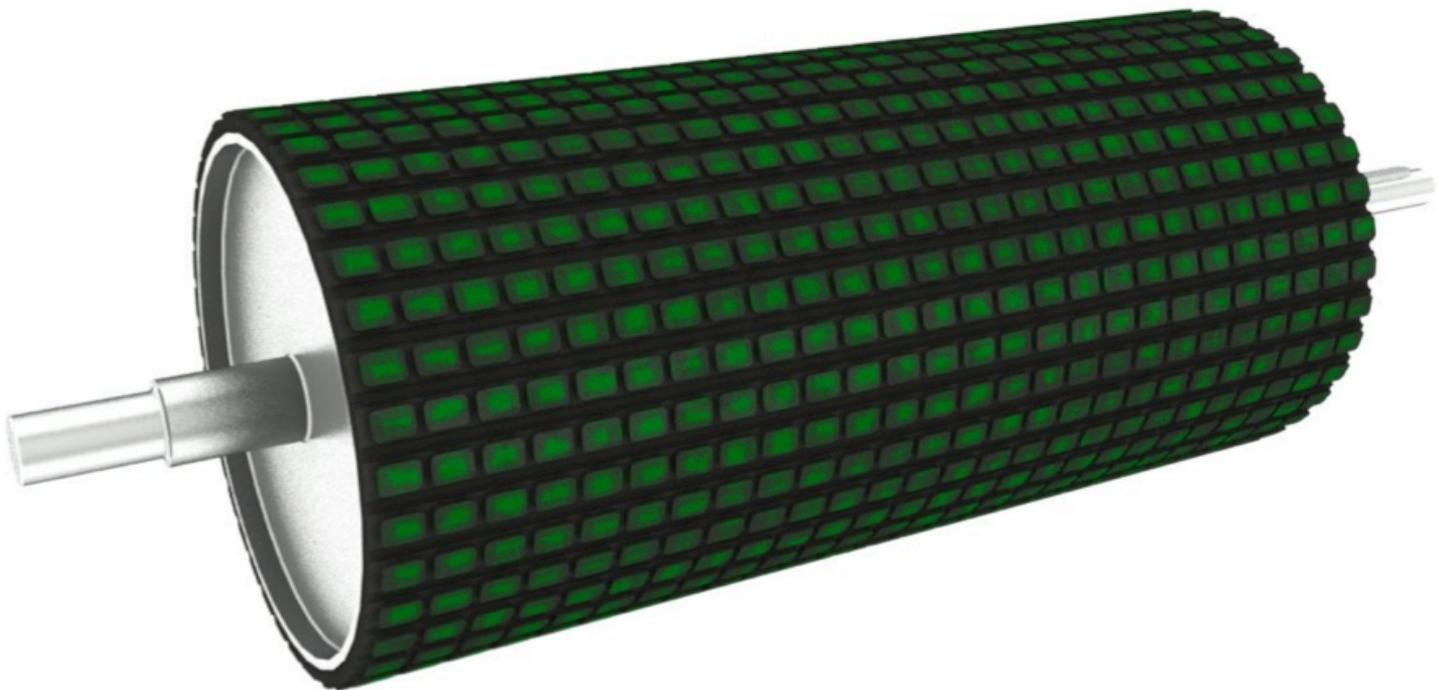

Composite coating
Ceramic / Rubber
High performance

- Pre-glued side
- Layer of 480x1850
- Ceramic on 47% of the surface
- Longitudinal and transversal evacuation
- Friction coefficient in dry conditions 0,60
- Friction coefficient in humid conditions 0,50
- Lifetime compared to rubber 350% to 400%

A special composition of ceramic grains bonded by means of a binder in very hard pastille of 20x30 th. 10

The porosity of the pastille allows

- to get away from aquaplaning phenomenon because the water is absorbed and then rejected. In case of clogging, the material is pressed and dried to be permanently evacuated
- to always offer the same roughness and friction coefficient regardless its wear level

